




Detail of the Base Connection

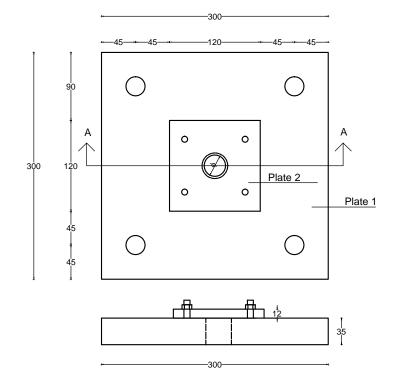

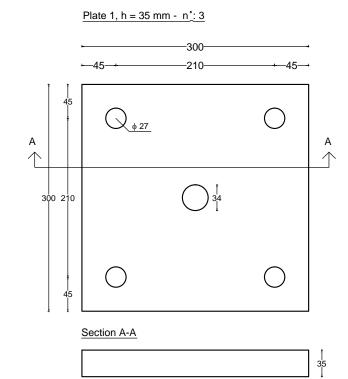

Details of the top and bottom Connections

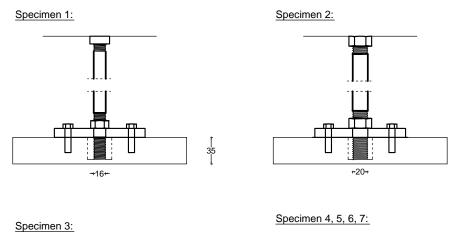

RESOURCES REQUIRED		QUIRED
	ELEMENT	NUMBER OF ELEMENTS
	Plate 1	1
	Plate 2	1
	Adapter for bottom connection: $\phi_e = 32$ mm; $\phi_i = 16$ mm	1
	Adapter for bottom connection: $\phi_e = 32 \text{ mm}; \ \phi_i = 16 \text{ mm}$	1
	Adapter for bottom connection: $\phi_e = 32$ mm; $\phi_i = 16$ mm	1
	Adapter for top connection: $\phi_e = 50.8 \text{ mm}$; $\phi_i = 16 \text{ mm}$	1
	Adapter for top connection: $\phi_e = 50.8 \text{ mm}; \ \phi_i = 20 \text{ mm}$	1
	Adapter for top connection: $\phi_e = 50.8 \text{ mm}; \ \phi_i = 24 \text{ mm}$	1

5pecimen 3:

35

Tav. 3: Test Set up and Details of External Dissipator Devices Prepared

Scale:

Chapter 3: Plug and Play Experimental Testing